



TOKISTAR LIGHTING INSTRUCTION MANUAL

LDR8-80

8VDC/80 WATT LED DRIVER

General

Tokistar's LDR8-80 is an 80 Watt Class 2 LED Driver used to convert an AC input into an 8VDC output. It may be operated from a wide range of input voltages, and is provided within an enclosure suitable for wet locations.

Wiring Procedures

To access both the AC and DC wiring compartments, remove the top cover by removing the 4 screws using a Philips screwdriver. Ensure the white plastic washers on each screw are not lost during removal.

Input Connections

Install and secure the AC conduit pipe to the LED Driver's 1/2" knockout by using the proper conduit fitting hardware. The AC input wires should be protruding from the conduit pipe and into the LED Driver's AC wiring compartment.

(Note: For installation in outdoor or wet locations, liquid tight fittings and conduit must be used for proper NEMA 3/IP65 protection.)

Connect the AC input wires to the LED Driver using the proper UL approved wire nuts. The **Black wire** from the unit should connect to the incoming AC Line wire. The **White wire** from the unit should connect to the incoming AC Neutral wire. The **Yellow/Green wire** from the unit should connect to the incoming AC Ground wire.


(Note: The complete metal case is referenced to AC ground upon proper installation of AC input wires.)

PRECAUTIONS

1. Read all instructions completely before beginning installation.
2. Turn off electricity before beginning installation.
3. All wiring is to be performed by a qualified electrician.
4. Installation must comply with the National Electrical Code, and all applicable codes.
5. Turn main supply to LED Driver on only after all connections are made and tested.
6. Use only LED Drivers provided by Tokistar with the system.

WARNING!

Do Not Connect Input Wires to Dimmer.
This Will Damage the Driver.

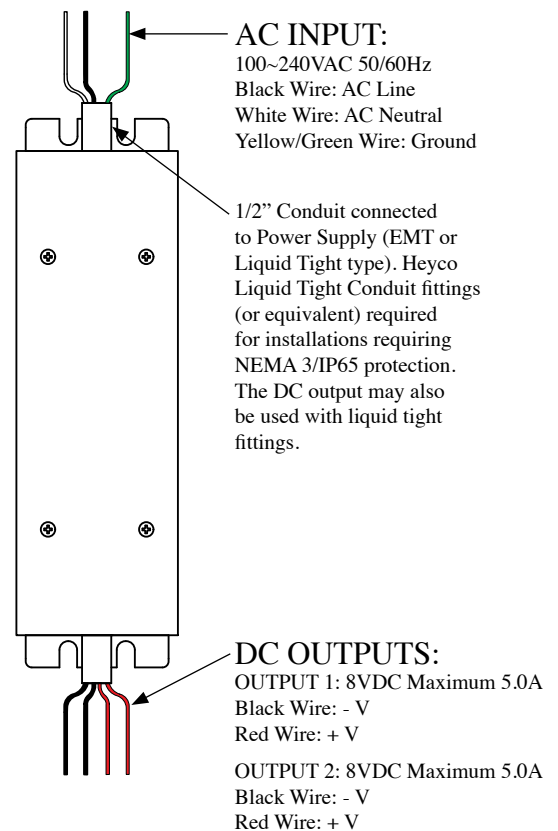

TOKISTAR® LIGHTING

1561 N. Gemini Pl.

Anaheim, CA 92801

TEL: 714 772 7005 FAX: 714 772 7014

email: info@tokistar.com Website: tokistar.com

LDR8-80

8VDC/80 WATT LED DRIVER

Output Connections

Connect the LED Driver's DC wires to the LED lighting fixture. The wire connections are made within the LED Driver's DC wiring compartment, using wire nuts or other appropriate electrical connection. One **Black wire** from the unit is the DC negative side of one of the two 40 Watt outputs, and should connect to the first lighting fixture's DC negative '-' input. One **Red wire** from the unit is the DC positive side of one of the two 40 Watt outputs, and should connect to the lighting fixture's DC positive '+' input. The other **Black wire** is the DC negative side of the second of the two 40 Watt outputs, and should connect to the second lighting fixture's DC negative '-' input. The other **Red wire** from the unit is the DC positive side of the second of the two 40 Watt outputs, and should connect to the second lighting fixture's DC positive '+' input. The LED lighting fixture DC input wires can be secured to the LED Driver by attaching conduit pipe with conduit fittings, or cord and cord fittings to the LED Driver's 1/2" knockouts.


(Note: The output wires for each channel should not be interconnected.)

Check For Proper Operation

Once all wiring is completed, turn on the AC supply to check for proper LED lighting system operation. Once proper operation is confirmed, turn off the AC supply and then re-install the top cover of the LED Driver using the 4 screws and Philips screwdriver. Ensure the plastic washers are installed on each screw before re-installation. It is also important to ensure all wiring is maintained within each wiring compartment to prevent wires from being pinched between the cover's gasket and the unit's case.

(Note: In outdoor installations, or any installation in wet locations, tighten the screws using a torque controlled screwdriver with a torque setting of 4.0 to 6.0 inch pounds.)

Tokistar Systems are
ETL Listed when operated
from our LED Driver.

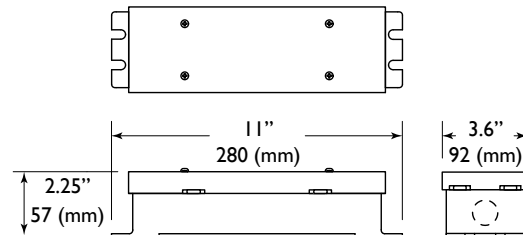

Specifications

Input Range: 100~240 VAC

Frequency Range: 50/60 Hz

Output: 8VDC (Adjustable +5% / -30%)

Max. Output Current: 10.0A (2 @ 5.0A)

Max. Output Power: 80W (2 @ 40W)

Protection: Overload, Overcurrent, Short Circuit

Operating Temperature: -30°C to +60°C

Mechanical Specifications

Dimensions: 3.6" x 11" x 2.25"

Weight: 4 lbs

Enclosure Rating: Nema 3/IP65

Mounting: Flange Mount

Connection: Knockouts for 1/2" Conduit

Compliance/Safety

Standards: UL Recognized Class 2/EN60950

LED Capacity

0.10 Watt LEDs: 800 pieces

0.20 Watt LEDs: 400 pieces

0.24 Watt LEDs: 332 pieces

0.32 Watt LEDs: 250 pieces

0.40 Watt LEDs: 200 pieces

TOKISTAR® LIGHTING

1561 N. Gemini Pl.

Anaheim, CA 92801

TEL: 714 772 7005 FAX: 714 772 7014

email: info@tokistar.com Website: tokistar.com