



# TOKISTAR LIGHTING INSTRUCTION MANUAL

## LDR8-40

## 8VDC/40 WATT LED DRIVER

### General

Tokistar's LDR8-40 is a 40 Watt Class 2 LED Driver used to convert an AC input into an 8VDC output. It may be operated from a wide range of input voltages, and is provided within an enclosure suitable for wet locations.

### Wiring Procedures

To access both the AC and DC wiring compartments, remove the top cover by removing the 4 screws using a Philips screwdriver. Ensure the white plastic washers on each screw are not lost during removal.

### Input Connections

Install and secure the AC conduit pipe to the LED Driver's 1/2" knockout by using the proper conduit fitting hardware. The AC input wires should be protruding from the conduit pipe and into the LED Driver's AC wiring compartment.


**(Note: For installation in outdoor or wet locations, liquid tight fittings and conduit must be used for proper NEMA 3/IP65 protection.)**

Connect the AC input wires to the LED Driver using the proper UL approved wire nuts. The **Black** wire from the unit should connect to the incoming AC Line wire. The **White** wire from the unit should connect to the incoming AC Neutral wire. The **Yellow/Green** wire from the unit should connect to the incoming AC Ground wire.

**(Note: The complete metal case is referenced to AC ground upon proper installation of AC input wires.)**

### WARNING!

Do Not Connect Input Wires to Dimmer.  
This Will Damage the Driver.

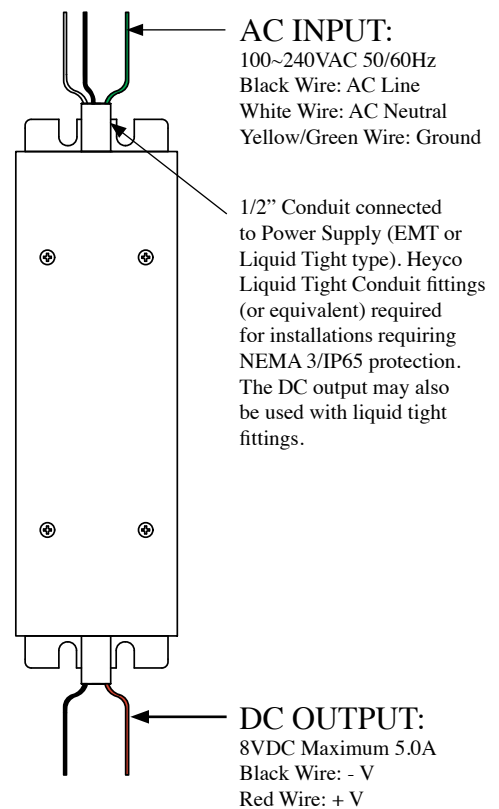

### ⚠ PRECAUTIONS

1. Read all instructions completely before beginning installation.
2. Turn off electricity before beginning installation.
3. All wiring is to be performed by a qualified electrician.
4. Installation must comply with the National Electrical Code, and all applicable codes.
5. Turn main supply to LED Driver on only after all connections are made and tested.
6. Use only LED Drivers provided by Tokistar with the system.

## TOKISTAR® LIGHTING

1561 N. Gemini Pl.  
Anaheim, CA 92801  
TEL: 714 772 7005 FAX: 714 772 7014  
email: info@tokistar.com Website: tokistar.com

# LDR8-40

# 8VDC/40 WATT LED DRIVER

## Output Connections


Connect the LED Driver's DC output wires to the LED lighting fixture. The wire connections are made within the LED Driver's DC wiring compartment, using wire nuts or other appropriate electrical connection. The **Black wire** from the unit should connect to the lighting fixture's DC negative '-' input. The **Red wire** from the unit should connect to the lighting fixture's DC positive '+' input. The LED lighting fixture DC input wires can be secured to the LED Driver by attaching conduit pipe with conduit fittings or cord and cord fittings to the LED Driver's 1/2" knockout.

## Check For Proper Operation

Once all wiring is completed, turn on the AC supply to check for proper LED lighting system operation. Once proper operation is confirmed, turn off the AC supply and then re-install the top cover of the LED Driver using the 4 screws and Philips screwdriver. Ensure the plastic washers are installed on each screw before re-installation. It is also important to ensure all wiring is maintained within each wiring compartment to prevent wires from being pinched between the cover's gasket and the unit's case.

**(Note: In outdoor installations, or any installation in wet locations, tighten the screws using a torque controlled screwdriver with a torque setting of 4.0 to 6.0 inch pounds.)**

Tokistar Systems are ETL Listed when operated from our LED Driver.

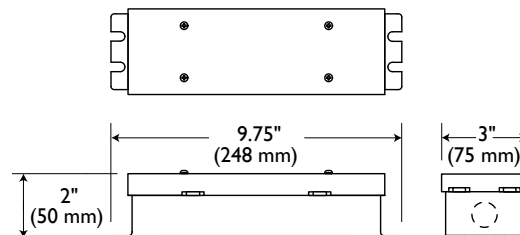

## Specifications

Input Range: 100~240 VAC  
Frequency Range: 50/60 Hz  
Output: 8VDC (Adjustable +10% / -25%)  
Max. Output Current: 5.0A  
Max. Output Power: 40W  
Protection: Overload, Overcurrent, Short Circuit  
Operating Temperature: -30°C to +60°C

## Mechanical Specifications

Dimensions: 3" x 9.75" x 2"  
Weight: 1.94 lbs  
Enclosure Rating: Nema 3/IP65  
Mounting: Flange Mount  
Connection: Knockouts for 1/2" Conduit

## Compliance/Safety

Standards: UL Recognized Class 2/EN60950

## LED Capacity

0.10 Watt LEDs: 400 pieces  
0.20 Watt LEDs: 200 pieces  
0.24 Watt LEDs: 166 pieces  
0.32 Watt LEDs: 125 pieces  
0.40 Watt LEDs: 100 pieces

## TOKISTAR® LIGHTING

1561 N. Gemini Pl.  
Anaheim, CA 92801  
TEL: 714 772 7005 FAX: 714 772 7014  
email: info@tokistar.com Website: tokistar.com