


LS-0.1 Watt TOKILEDDS®

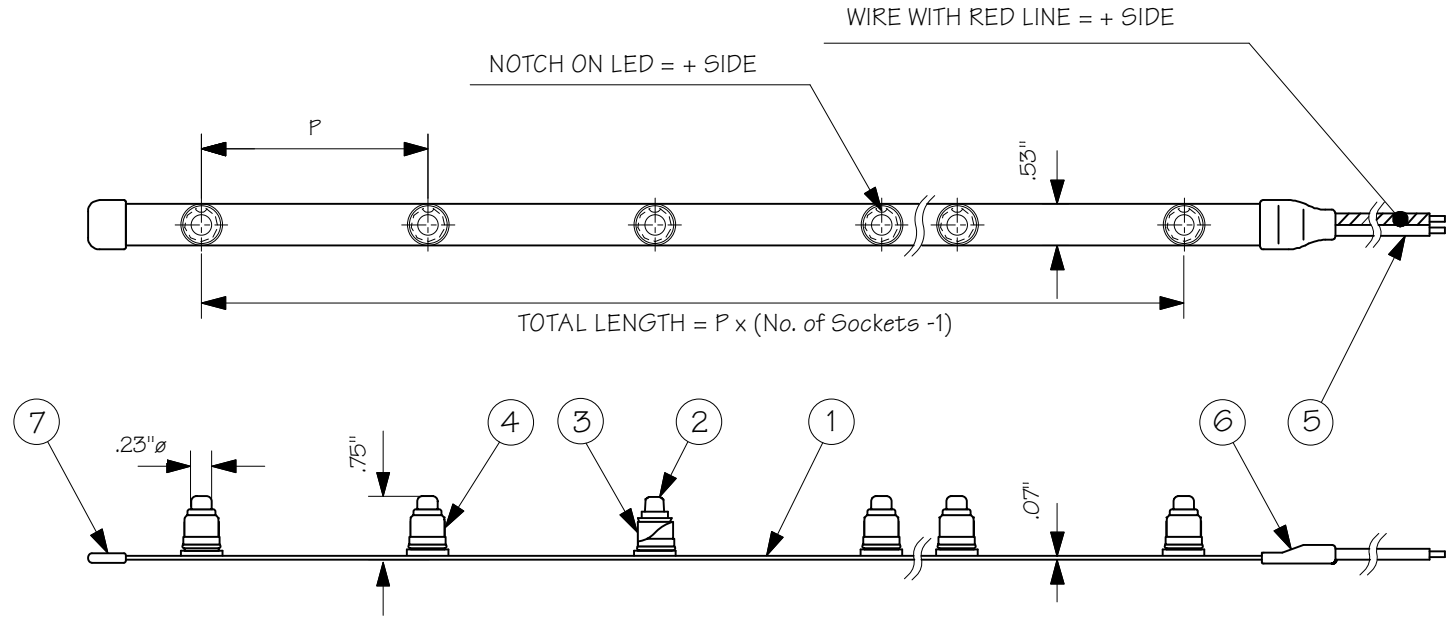

CATALOG#	P (INCH)	MAX. LENGTH
LSW-15-(LED CODE)	0.6" ± .08	20 FT.
LSW-30-(LED CODE)	1.2 ± .08	40 FT.
LSW-50-(LED CODE)	2 ± .08	66 FT.
LSW-80-(LED CODE)	3 ± .12	88 FT.
LS(W,C,B)-100-(LED CODE)	4 ± .16	98 FT.
LS(W,C,B)-150-(LED CODE)	6 ± .20	120 FT.
LS(W,C,B)-300-(LED CODE)	12 ± .40	164 FT.

LS CABLE COLOR CODE: W=WHITE, C=CLEAR, B=BROWN
 CLEAR AND BROWN AVAILABLE IN 4", 6" AND 12" SPACING ONLY

0.1 WATT TOKILEDDS® 8VDC/12.5mA				
PART#	LED CODE	COLOR	LUMEN	WAVELENGTH
TLED-WW	WW	2400K WHITE	0.9Lm	590.2
TLED-IW	IW	3000K WHITE	1.0Lm	577.0
TLED-WH	WH	6500K WHITE	1.4Lm	480.5
TLED-AM	AM	AMBER	0.3Lm	588.6
TLED-BL	BL	BLUE	0.4Lm	469.9
TLED-GR	GR	GREEN	1.8Lm	525.3
TLED-MG	MG	MAGENTA	0.4Lm	573.0
TLED-PL	PL	PURPLE	0.4Lm	578.9
TLED-RD	RD	RED	0.3Lm	625.4



TOKISTAR LIGHTING INC.
 1561 N. GEMINI PL.
 ANAHEIM, CA 92801
 TEL: 714 772 7005 FAX: 714 772 7014
 email: info@tokistar.com Website: tokistar.com

TAPELIGHT SERIES SUBMITTAL	NO.	PART	MATERIAL
CATALOG#: LS_--(LED CODE)	1	CABLE	PVC INSULATION WITH PLATED COPPER CONDUCTORS
DATE: NOVEMBER 3, 2008	2	LED	SOLID STATE LED
DRAWN BY: R. CORDOVA	3	LAMP SOCKET	POLYCARBONATE WITH PLATED COPPER CONTACTS
SCALE: 1:2	4	CAP	SILICONE (CLEAR)
WEIGHT: 31g/ft.	5	LEAD WIRE	PVC INSULATION WITH PLATED #12 AWG X 2
	6	CORD PROTECTOR	PVC
	7	END CAP	PVC