


TLP-0.1 Watt TOKILEDSDS®



CATALOG#	P (INCH)	MAX. LENGTH
TLP-30-(LED CODE)	1.2 ± .08	32 FT.
TLP-50-(LED CODE)	2 ± .08	41 FT.
TLP-80-(LED CODE)	3 ± .12	52 FT.
TLP-100-(LED CODE)	4 ± .16	58 FT.
TLP-150-(LED CODE)	6 ± .20	71 FT.

0.1 WATT TOKILEDSDS® 8VDC/12.5mA				
PART#	LED CODE	COLOR	LUMEN	WAVELENGTH
TLED-WW	WW	2400K WHITE	0.9Lm	590.2
TLED-IW	IW	3000K WHITE	1.0Lm	577.0
TLED-WH	WH	6500K WHITE	1.4Lm	480.5
TLED-AM	AM	AMBER	0.3Lm	588.6
TLED-BL	BL	BLUE	0.4Lm	469.9
TLED-GR	GR	GREEN	1.8Lm	525.3
TLED-MG	MG	MAGENTA	0.4Lm	573.0
TLED-PL	PL	PURPLE	0.4Lm	578.9
TLED-RD	RD	RED	0.3Lm	625.4

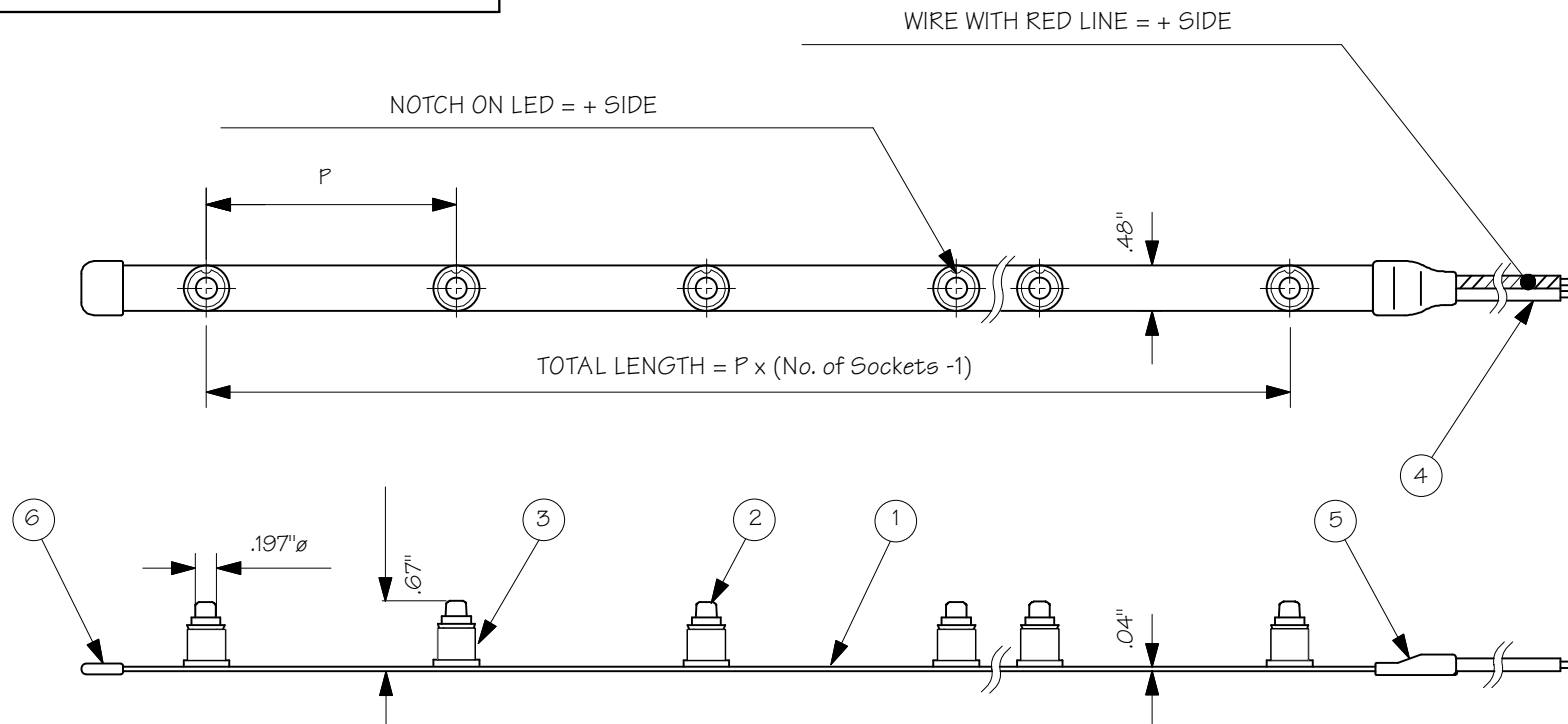

TOKISTAR LIGHTING INC.

1561 N. GEMINI PL.
ANAHEIM, CA 92801
TEL: 714 772 7005 FAX: 714 772 7014
email: info@tokistar.com Website: tokistar.com

TAPELIGHT SERIES SUBMITTAL	NO.	PART	MATERIAL
CATALOG#: TLP_-(LED CODE)	1	CABLE	PVC INSULATION WITH PLATED COPPER CONDUCTOR
DATE: NOVEMBER 3, 2008	2	LED	SOLID STATE LED
DRAWN BY: R. CORDOVA	3	LAMP SOCKET	POLYCARBONATE WITH PLATED COPPER CONTACTS
SCALE: 1:2	4	LEAD WIRE	PVC INSULATION WITH PLATED #18 AWG X 2
WEIGHT: 21 g/ft.	5	CORD PROTECTOR	PVC
	6	END CAP	PVC