


TLW-0.15 Watt TOKILED[®]S

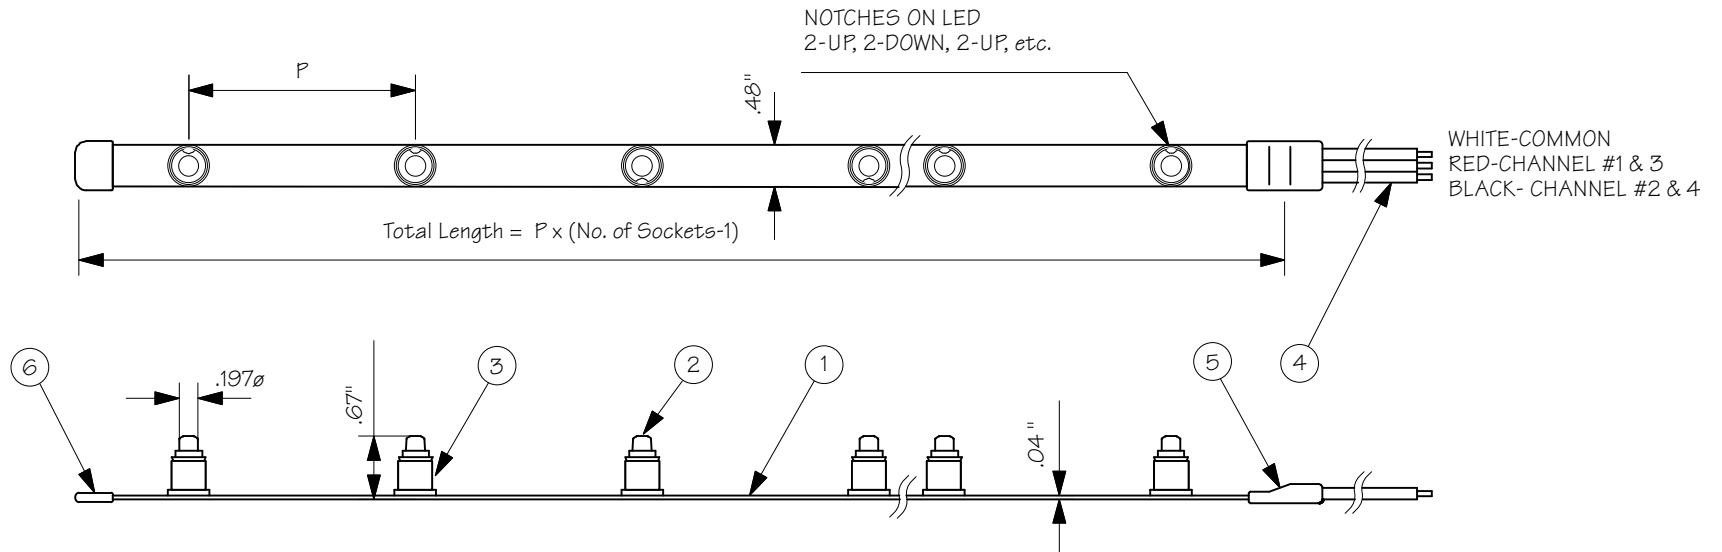

CATALOG#	P (INCH)	MAX. LENGTH
TLW-30- <u> </u>	1.2 \pm .08	24 FT.
TLW-50- <u> </u>	2 \pm .08	43 FT.
TLW-80- <u> </u>	3 \pm .12	70 FT.
TLW-100- <u> </u>	4 \pm .16	84 FT.
TLW-150- <u> </u>	6 \pm .20	103 FT.

0.15 WATT TOKILED[®]S 12VAC/12.5mA

PART #	LED CODE	COLOR	LUMEN	WAVELENGTH
TLED-WW	TLED-WW	2400K WHITE	0.9Lm	590.2
TLED-IW	TLED-IW	3000K WHITE	1.0Lm	577.0
TLED-WH	TLED-WH	6500K WHITE	1.4Lm	480.5
TLED-AM	TLED-AM	AMBER	0.3Lm	588.6
TLED-BL	TLED-BL	BLUE	0.4Lm	469.9
TLED-GR	TLED-GR	GREEN	1.8Lm	525.3
TLED-MG	TLED-MG	MAGENTA	0.4Lm	573.0
TLED-PL	TLED-PL	PURPLE	0.4Lm	578.9
TLED-RD	TLED-RD	RED	0.3Lm	625.4



TOKISTAR LIGHTING INC.

1561 N. GEMINI PL.
ANAHEIM, CA 92801
TEL: 714 772 7005 FAX: 714 772 7014
email: info@tokistar.com Website: tokistar.com

TAPELIGHT SERIES SUBMITTAL

CATALOG#: TLW- -

DATE: NOVEMBER 3, 2008

DRAWN BY: R. CORDOVA

SCALE: 1:2

WEIGHT: 25 g/ft.

NO.

PART

MATERIAL

1

2

3

4

5

6

WIRE

LED

LAMP SOCKET

LEAD WIRE

CORD PROTECTOR

END CAP

PVC INSULATION WITH PLATED COPPER CONDUCTOR

SOLID STATE LED

POLYCARBONATE WITH PLATED COPPER CONTACTS

PVC INSULATION WITH PLATED #18 AWG X 3

PVC

PVC