


# TLW-0.30 Watt TOKILEDS®

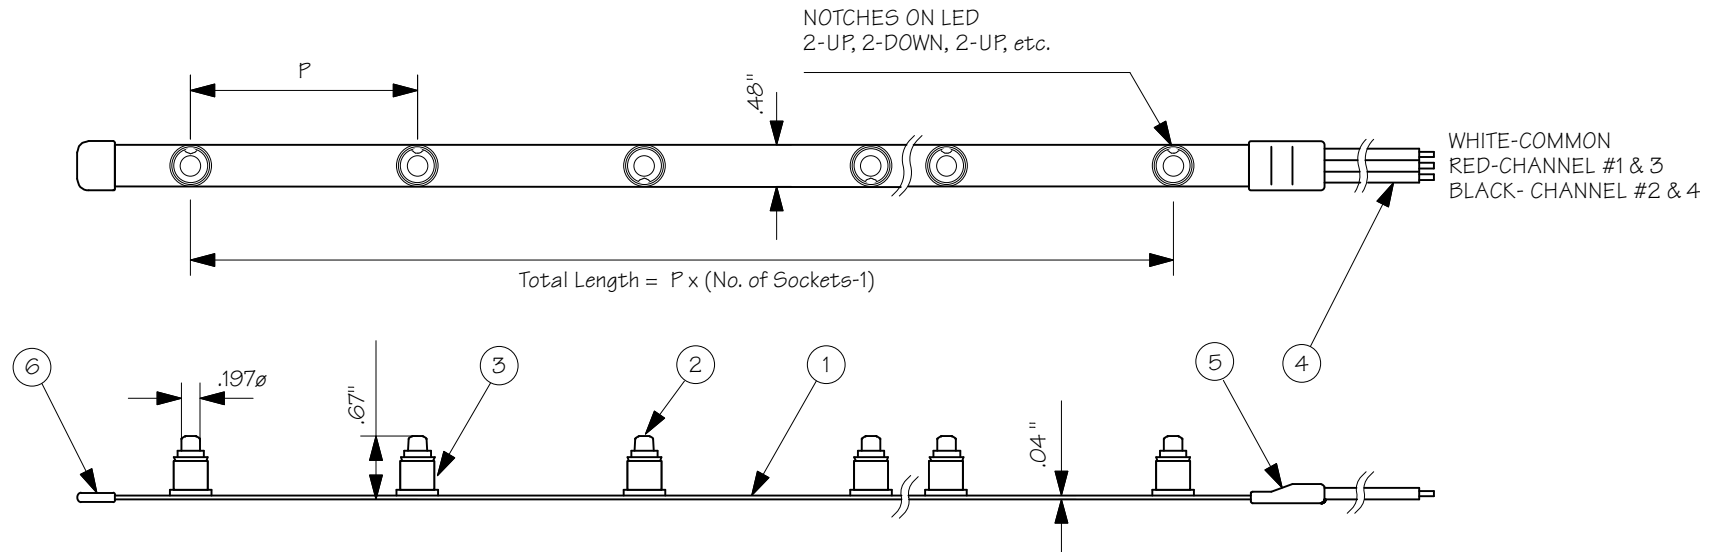

WHITE-COMMON  
RED-CHANNEL #1 & 3  
BLACK- CHANNEL #2 & 4

CATALOG#	P (INCH)	MAX. LENGTH
TLW-30- <u>  </u>	1.2 ± .08	11 FT.
TLW-50- <u>  </u>	2 ± .08	19 FT.
TLW-80- <u>  </u>	3 ± .12	30 FT.
TLW-100- <u>  </u>	4 ± .16	40 FT.
TLW-150- <u>  </u>	6 ± .20	66 FT.

0.30 WATT TOKILED® 12VAC/25.0mA				
PART #	LED CODE	COLOR	LUMEN	WAVELENGTH
TLED-WW-HB	WW-HB	2400K WHITE	2.4Lm	589.5
TLED-IW-HB	IW-HB	3000K WHITE	2.6Lm	574.1
TLED-WH-HB	TWH-HB	6500K WHITE	3.2Lm	482.3



## TOKISTAR LIGHTING INC.

1561 N. GEMINI PL.  
ANAHEIM, CA 92801  
TEL: 714 772 7005 FAX: 714 772 7014  
email: info@tokistar.com Website: tokistar.com

TAPELIGHT SERIES SUBMITTAL	NO.	PART	MATERIAL
CATALOG#: TLW- <u>  </u> - <u>  </u>	1	WIRE	PVC INSULATION WITH PLATED COPPER CONDUCTOR
DATE: NOVEMBER 3, 2008	2	LED	SOLID STATE LED
DRAWN BY: R. CORDOVA	3	LAMP SOCKET	POLYCARBONATE WITH PLATED COPPER CONTACTS
SCALE: 1:2	4	LEAD WIRE	PVC INSULATION WITH PLATED #18 AWG X 3
WEIGHT: 25 g/ft.	5	CORD PROTECTOR	PVC
	6	END CAP	PVC