



TOKISTAR® LIGHTING INC.

TokiLux™

New from Tokistar




END CAP
End fittings cap the end of run to insulate the track.

CLAMPS
Mounting clamps are screwed in place, and the track snapped in.

CONNECTORS
Flexible connectors for joining sections and turning corners.

TokiLux™ combines the popularity of LED color mixing with the plug-and-go simplicity of traditional tracklighting. Lengths of track can be connected up to 32 feet in length. Flexible connectors are available for turning corners or following curves. The system operates from 24VDC power supplies, and consumes only 3.2 watts per linear foot.

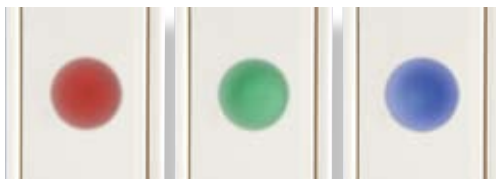

ColorBar



Track Profile

LEAD CONNECTOR
Connectors with 5 ft. lead wires power one end of the track.

TOKISTAR® LIGHTING INC.

1561 N. Gemini Place • Anaheim, CA 92801

Tel: 714.772.7005 • Fax: 714.772.7014 • Toll free in U.S.A.: 877.340.7633

E-mail: info@tokistar.com • Web site: www.tokistar.com